

Automatic Filler and Seamer



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS011361 CS021061	CS011451 CS021061	CS011441 CS021081	CS011551 CS021081
Number of filling valves	36	45	44	55
Number of seamer heads	6	6	8	8
Min/ Max can body diameter	202D-401D	202D-401D	202D-300D	202D-300D
Min / Max can height (mm)	70 – 180			
Capacity (cpm)	up to 450	up to 550	up to 650	up to 720
Filling tank volume (L)	185	220	185	220
Volume tolerance (ml)	± 3			
Required horse power (hp)	10		15	
Motor brand ; Motor position	SIEMENS ; Side edge of seamer's upper			
Lubricating system	Automatic lubricating system			
Cap stacking channel length (m)	1.5(stainless steel)			
Automatic stop conditions	Lack of cap ; No cap ; Abnormal of entrance or exit			
Restart and Revert	Recover manually			
Stack/Lack of caps in output transporting belt	Set control mode , Manual mode / Automatic mode			
PLC	SCHNEIDER			
Sensor	SICK			
Pneumatic cylinder	MINDMAN			
Air Unit	POSU F.R.L Combination Unit			
Air requirement (L / min)	8.5(approx)			
Pneumatic Pressure (bar)	3~5			
Floor space and height (mm)	5100×2400×2700	5300×2700×2700	5000×2300×2700	5300×2700×2700
Feeding/ Discharging line height (mm)	900			
Net weight (kg , approx)	6800	7100	6800	7100



Chang Shen Machinery Co., Ltd.





No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS011361&CS021061 Automatic Filler and Seamer

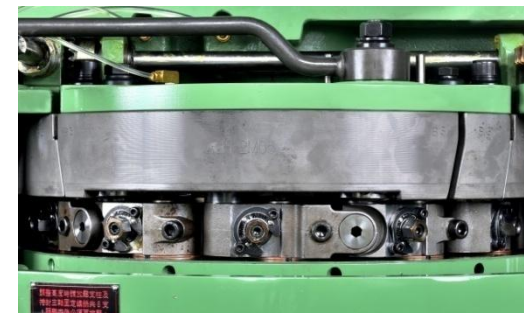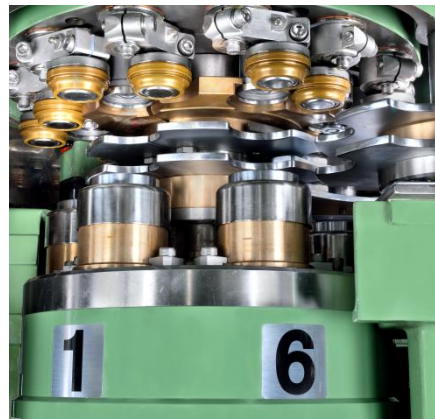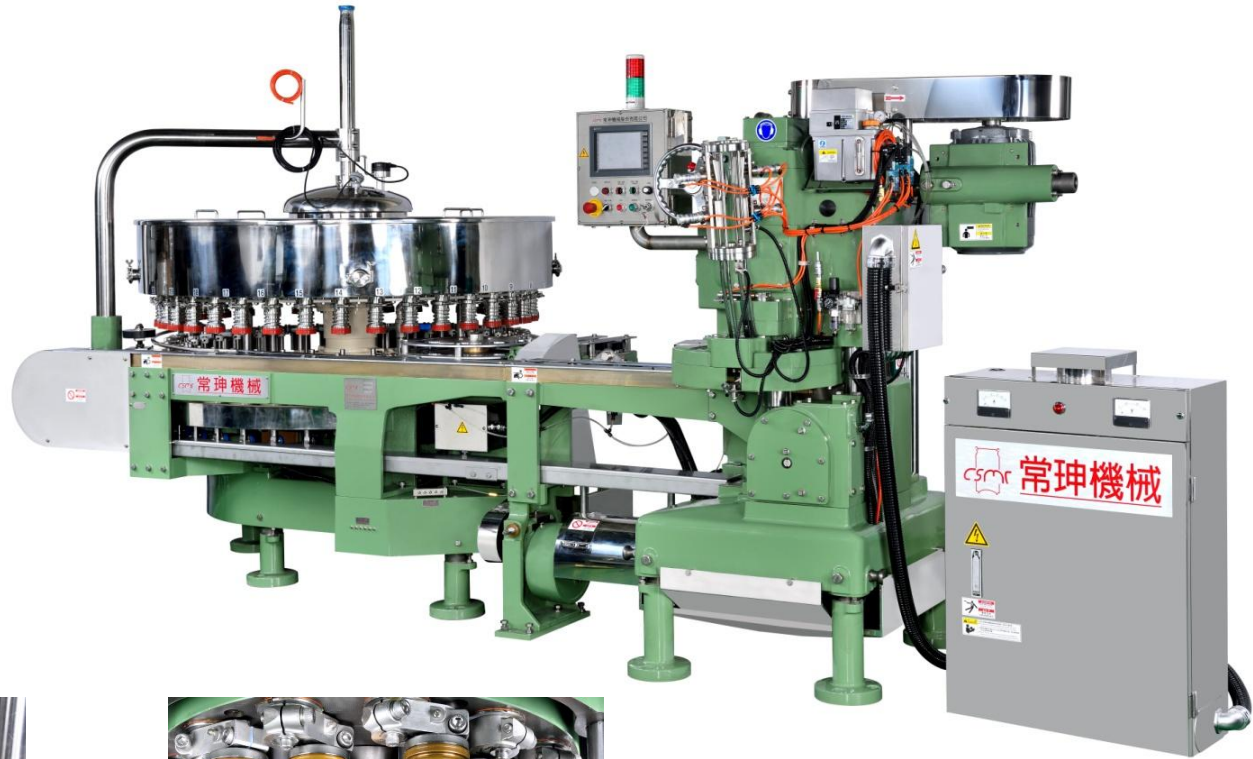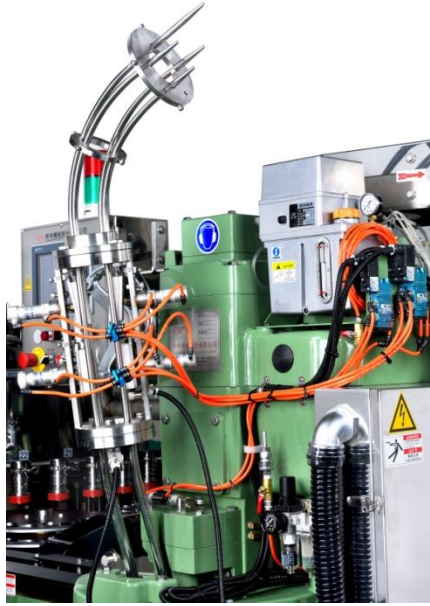

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS011361 CS021061	
Number of filling valves		36	
Number of seamer heads		6	
Can body diameter	Can lid diameter	202D-401D	113D-401D
Min / Max can height (mm)		70 – 180	
Capacity (cpm)		up to 450 (depend on can diameter and height)	
Filling tank volume (L)		185	
Volume tolerance (ml)		± 3	
Required horse power (hp)		10	
Motor brand ; Motor position		SIEMENS ; Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack /Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		5100×2400×2700	
Feeding/ Discharging height (mm)	Net weight (kg , approx)	900	6800
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning(for seamer)	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS011451&CS021061 Automatic Filler and Seamer



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788 Fax : +886-4-26595789 Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS011451 CS021061	
Number of filling valves		45	
Number of seamer heads		6	
Can body diameter	Can body diameter	202D-401D	113D-401D
Min/ Max can height (mm)		70 – 180	
Capacity (cpm)		up to 550 (depend on can diameter and height)	
Filling tank volume (L)		220	
Volume tolerance (ml)		± 3	
Required horse power (hp)		10	
Motor brand ; Motor position		SIEMENS ; Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		5300×2700×2700	
Feeding/ Discharging height (mm)	Net weight (kg , approx)	900	7100
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning(for seamer)	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS011441&CS021081 Automatic Filler and Seamer

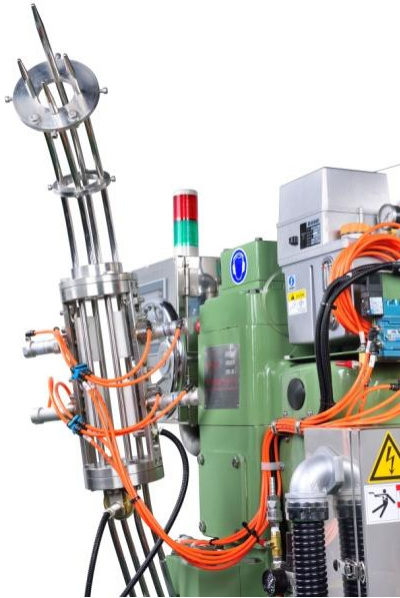

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS011441 CS021081	
Number of filling valves		44	
Number of seamer heads		8	
Can body diameter	Can lid diameter	202D-300D	113D-214D
Min / Max can height (mm)		70 – 180	
Capacity (cpm)		up to 650 (depend on can diameter and height)	
Filling tank volume (L)		185	
Volume tolerance (ml)		± 3	
Required horse power (hp)		15	
Motor brand ; Motor position		SIEMENS ; Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		5000×2300×2700	
Feeding/Discharging height (mm)	Net weight (kg , approx)	900	6800
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning(for seamer)	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS011551&CS021081 Automatic Filler and Seamer



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS011551 CS021081	
Number of filling valves		55	
Number of seamer heads		8	
Can body diameter	Can lid diameter	202D-300D	113D-214D
Min / Max can height (mm)		70 – 180	
Capacity (cpm)		up to 720 (depend on can diameter and height)	
Filling tank volume (L)		220	
Volume tolerance (ml)		± 3	
Required horse power (hp)		15	
Motor brand ; Motor position		SIEMENS ; Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		5300×2700×2700	
Feeding/ Discharging height (mm)	Net weight (kg , approx)	900	7100
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning(for seamer)	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS02A06W Automatic Double Seamer



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS02A06W	
Number of seamer heads		6	
Can body diameter	Can lid diameter	202D-401D	113D-401D
Min / Max can height (mm)		70 – 180	
Capacity (cpm)		up to 500 (depend on can diameter and height)	
Required horse power (hp)		10	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		2800×1000×2700	
Feeding/ Discharging height(mm)	Net weight (kg , approx)	900	2600
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS02106E Automatic Double Seamer



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS02106E	
Number of seamer heads		6	
Can body diameter	Can lid diameter	202D-401D	113D-401D
Min/ Max can height (mm)		70 – 180	
Capacity (cpm)		up to 550 (depend on can diameter and height)	
Required horse power (hp)		10	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack & Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L/ min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		2900×1600×2500	
Feeding/ Discharging height (mm)	Net weight (kg , approx)	900	2600
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS021060 Automatic Double Seamer

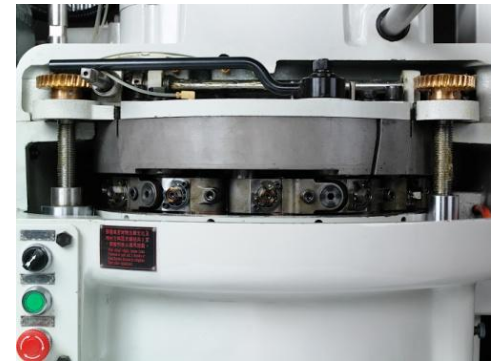

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS021060	
Number of seamer heads		6	
Can body diameter	Can lid diameter	202D-401D	113D-401D
Min / Max can height (mm)		70 – 180	
Capacity (cpm)		up to 550 (depend on can diameter and height)	
Required horse power (hp)		10	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder ; Pneumatic Valve		MINDMAN ; ASHUN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		2900×1600×2500	
Feeding/Discharging height(mm)	Net weight (kg , approx)	900	2600
Additional device (not include in total price)		Auto height positioning	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS021080 Automatic Double Seamer

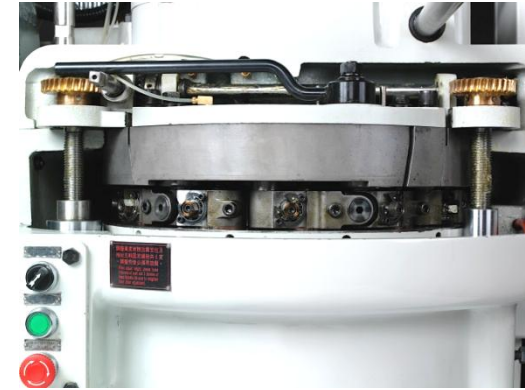

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS021080	
Number of seamer heads		8	
Can body diameter	Can lid diameter	202D-300D	113D-214D
Min/ Max can height (mm)		70 – 180	
Capacity (cpm)		up to 750 (depend on can diameter and height)	
Required horse power (hp)		10	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder		MINDMAN ; ASHUN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		2900×1600×2500	
Feeding/Discharging height (mm)	Net weight (kg , approx)	900	2600
Additional device (not include in total price)		Auto height positioning	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS02110W Automatic Double Seamer



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788 Fax : +886-4-26595789 Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS02110W	
Number of seamer heads		10	
Can body diameter	Can lid diameter	211D	206D-209D
Min / Max can height (mm)		70 – 180	
Capacity (cpm)		up to 800 (depend on can diameter and height)	
Required horse power (hp)		20	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder		MINDMAN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		3000×1600×2700	
Feeding / Discharging height(mm)	Net weight (kg , approx)	910	3000
Additional device (not include in total price)		Steam Supply or CO2/N2 Supply, Auto height positioning	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS022060 Automatic Double Seamer

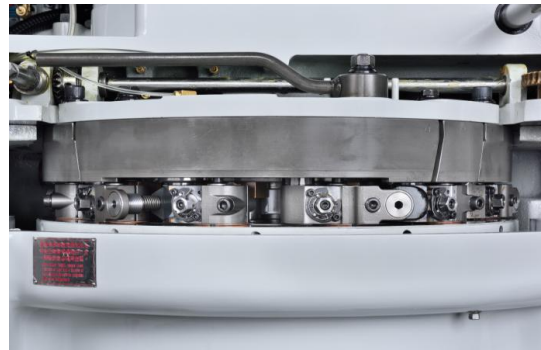

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS022060	
Number of seamer heads		6	
Can body diameter	Can lid diameter	401D-508D	401D-502D
Min/ Max can height (mm)		110 – 210	
Capacity (cpm)		up to 200 (depend on can diameter and height)	
Required horse power (hp)		10	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder		ASHUN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		2400×1800×2100	
Feeding/Discharging height (mm)		900	
Net weight (kg , approx)		3500	
Additional device (not include in total price)		Auto height positioning	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS022060 Automatic Double Seamer

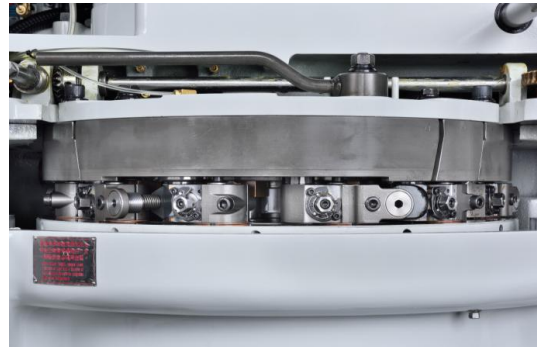

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model		CS022060	
Number of seamer heads		6	
Can body diameter	Can lid diameter	401D-508D	401D-502D
Min/ Max can height (mm)		110 – 210	
Capacity (cpm)		up to 200 (depend on can diameter and height)	
Required horse power (hp)		10	
Motor brand		SIEMENS	
Motor position		Side edge of seamer's upper	
Lubricating system		Automatic lubricating system	
Cap stacking channel length (m)		1.5(stainless steel)	
Automatic stop conditions		Lack of cap ; No cap ; Abnormal of entrance or exit	
Restart and Revert		Recover manually	
Stack/Lack of caps in output transporting belt		Set control mode , Manual mode / Automatic mode	
PLC		SCHNEIDER	
Sensor		SICK	
Pneumatic Cylinder		ASHUN	
Air Unit		POSU F.R.L Combination Unit	
Air requirement (L / min)		8.5(approx)	
Pneumatic Pressure (bar)		3~5	
Floor space and height (mm)		2500×2000×2500	
Feeding/Discharging height (mm)		975	
Net weight (kg , approx)		4600	
Additional device (not include in total price)		Auto height positioning	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS03108N Automatic Vertical Necking

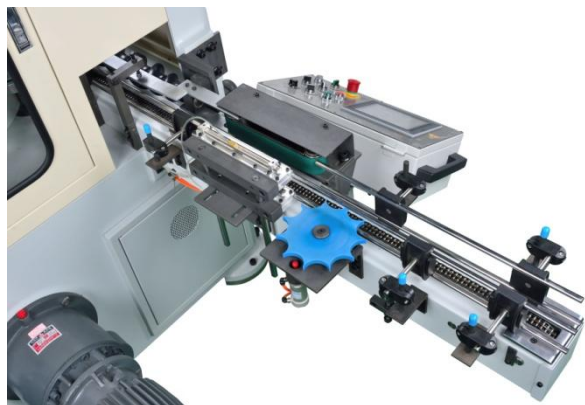

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS03108N	
Number of heads	one necking	
Min / Max can diameter	202D-401D	
Min / Max can height (mm)	85 – 180	
Capacity (cpm)	up to 750 (depend on can diameter and height)	
Required horse power (hp)	5	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	2900×2200×2000	
Feeding/Discharging height(mm)	900	3570
Net weight (kg , approx)		
Additional device (not include in total price)	Air condition/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS03108R Automatic Vertical Beading



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS03108R	
Number of heads	one beading	
Min / Max can diameter	202D-401D	
Min / Max can height (mm)	85 – 180	
Capacity (cpm)	up to 500 (depend on can diameter and height)	
Required horse power (hp)	7.5	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	2900×2500×2000	
Feeding/Discharging height (mm)	900	5380
Net weight (kg , approx)		
Additional device (not include in total price)	Air condition/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS03206B Automatic Vertical Flanging-Beading

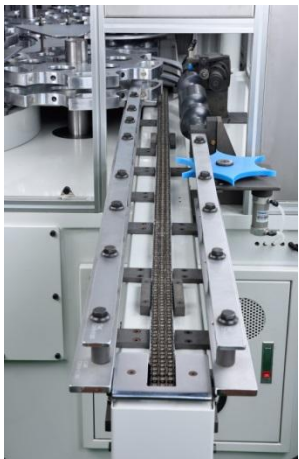

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS03206B	
Number of heads	one flanging and one beading	
Min / Max can diameter	401D-603D	
Min / Max can height (mm)	114 – 200	
Capacity (cpm)	up to 200 (depend on can diameter and height)	
Required horse power (hp)	15	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	5000×2900×2400	
Feeding line height (mm)	927	16000
Net weight (kg , approx)		
Additional device (not include in total price)	Air condition/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS032080 Automatic Vertical Necking and Flanging



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS032080	
Number of heads	one necking and one flanging	
Min / Max can diameter	202D-401D	
Min / Max can height (mm)	85 – 180	
Capacity (cpm)	up to 750 (depend on can diameter and height)	
Required horse power (hp)	7.5	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	2900×2200×2000	
Feeding line height (mm)	900	5500
Net weight (kg , approx)		
Additional device (not include in total price)	Air condition/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS033080 Automatic Vertical Necking and Flanging



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS033080	
Number of heads	two necking and one flanging	
Min / Max can diameter	202D-401D	
Min / Max can height (mm)	90 – 180	
Capacity (cpm)	up to 750 (depend on can diameter and height)	
Required horse power (hp)	15	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	3000×2500×2000	
Feeding/Discharging height (mm)	900	7300
Net weight (kg , approx)		
Additional device (not include in total price)	Air condition/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS03308R Automatic Vertical Necking / Flanging / Beading

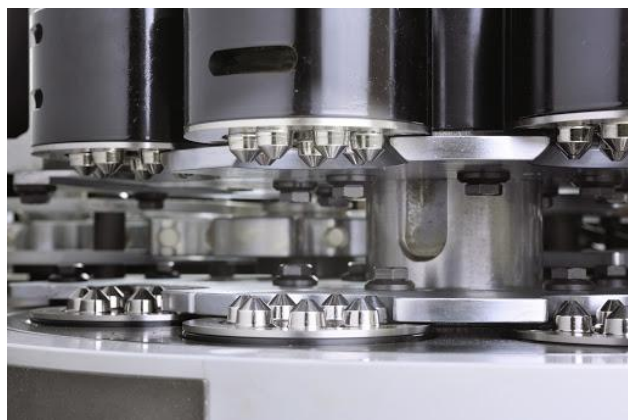

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS03308R	
Number of heads	One necking /One flanging/One beading	
Min/ Max can diameter	202D-300D	
Min/ Max can height (mm)	85 – 180	
Capacity (cpm)	up to 500 (depend on can diameter and height)	
Required horse power (hp)	15	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	3700×2500×2000	
Feeding/Discharging height(mm)	900	9300
Net weight (kg , approx)		
Additional device (not include in total price)	Air conditioner/Oil cooler/Auto height positioning /3 Sets of memory cans height /Customized Can Height	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS034080 Automatic Vertical Necking and Flanging



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Processing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel: +886-4-26595788

Fax: +886-4-26595789

Mail: biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS034080	
Number of heads	three necking and one flanging	
Min / Max can diameter	202D-401D	
Min / Max can height (mm)	95 – 180	
Capacity (cpm)	up to 750 (depend on can diameter and height)	
Required horse power (hp)	15	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	3300×2600×2000	
Feeding/Discharging height(mm)	900	9100
Net weight (kg , approx)		
Additional device (not include in total price)	Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS034080 Automatic Vertical Necking and Flanging



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS034080	
Number of heads	Three necking and one flanging	
Min/ Max can diameter	202D-401D	
Min/ Max can height (mm)	95 – 180	
Capacity (cpm)	up to 750 (depend on can diameter and height)	
Required horse power (hp)	15	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	3300×2600×2700	
Feeding/Discharging height(mm)	900	9100
Net weight (kg , approx)		
Additional device (not include in total price)	Air conditioner/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.


No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

CS036080 Automatic Vertical Necking and Flanging

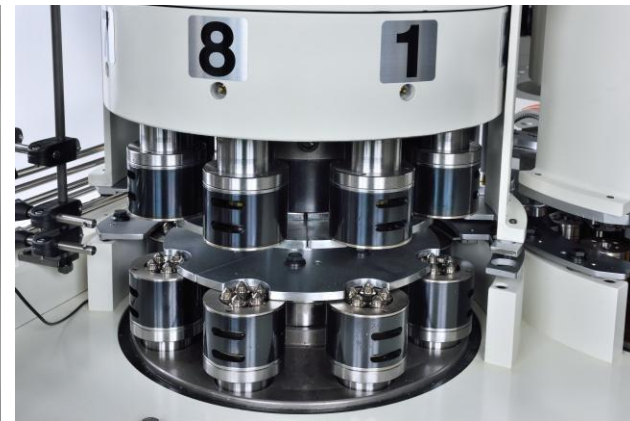

Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw

Specification (No further notification will be issued for changes of equipment specifications.)

Model	CS036080	
Number of heads	Five necking and One flanging	
Min/ Max can diameter	202D-401D	
Min / Max can height (mm)	74 – 260	
Capacity (cpm)	up to 600 (depend on can diameter and height)	
Required horse power (hp)	20	
Motor brand	SIEMENS	
Motor position	Side of the can's entrance	
Lubricating system	Automatic lubricating system	
Automatic stop conditions	Abnormal of entrance or exit	
Restart and Revert	Recover manually	
Stack/Lack of cans in output transporting belt	Set control mode , Manual mode / Automatic mode	
PLC	SCHNEIDER	
Sensor	SICK	
Pneumatic Cylinder	ASHUN	
Floor space and height (mm)	4700×2900×2800	
Feeding/Discharging height(mm)	900	16900
Net weight (kg , approx)		
Additional device (not include in total price)	Air conditioner/Oil cooler/Auto height positioning /3 Sets of memory can height /Customized Can Height	



Chang Shen Machinery Co., Ltd.

No.58, Jing 3rd Rd., Chungkang Export Porcessing Zone, Wuqi Dist., Taichung City 43541, Taiwan

Tel : +886-4-26595788

Fax : +886-4-26595789

Mail : biz@changshen.com.tw